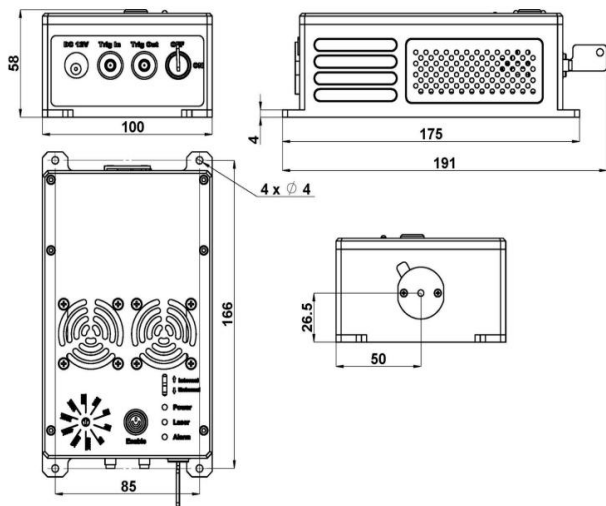
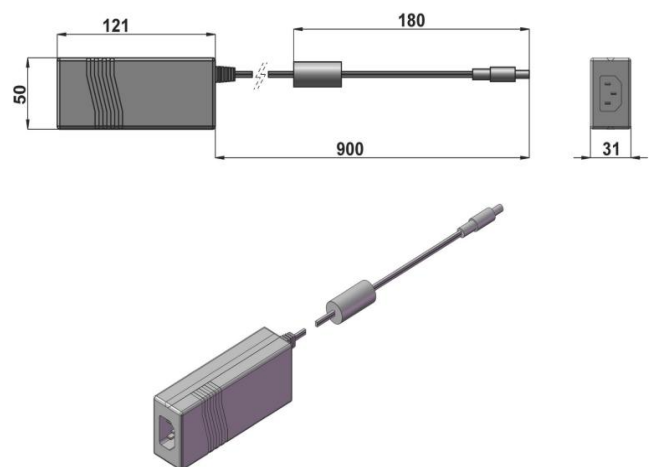


**785nm 50mW 100-1000ps 100kHz to 80MHz PICOSECOND PULSED INFRARED DIODE LASER**

It features integrated electronics, repetition rate 100kHz to 80MHz, synchronized signal output. Fast ON/OFF/multiplexing capability. Suitable for fluorescence excitation, time resolve spectrum, highly sensitive absorption spectroscopy, etc.

**Specifications**

型号Model No.	FU-MDL-PS-78550
波长Wavelength (nm)	785±5
峰值功率Peak Power (mW)	1~50
功率稳定性Power stability(rms, over 4 hours)	<3%, <2%, <1%
横向模式Transverse mode	Near TEM00
脉宽Pulse width (ps)	100~1000 (unadjustable)
工作方式Operating mode	Pulsed
用户触发频率User trigger frequency	100kHz~20MHz (Internal trigger available) or
孔径处光束直径Beam diameter at the aperture(1/e ² ,mm)	~1.2
光束发散角Beam divergence, Full Angle(mrad)	~1.0
预热时间Warm-up time(minutes)	<5
光束高度Beam height from base plate(mm)	26.5
工作温度Operating temperature(℃)	10~35
供电电压Operating voltage	DC12V 4A
保修期Warranty Time	1 year
激光头尺寸Laser head dimension(mm) / Weight	191(L)×100(W) ×58(H) mm ³ , 1.2kg
电源尺寸Power supply dimension(mm) / Weight	121(L) ×50(W) ×31(H) mm ³ , 0.3kg

191(L)×100(W) ×58(H) mm³ , 1.2kg121(L) ×50(W) ×31(H) mm³ , 0.3kg